

RECKLI 2/80 GRID FIX

A grid fix formliner in a brick look. When processing the bricks are inserted into the Rasterfix formliner and by a 3mm high chamfer. When choosing the brick, you should insist that the brick manufacturer supplies you with bricks that have the least dimensional tolerance. When using Rasterfix formliners, the bricks can be cast directly into the concrete. In contrast to veneered bricks, there are no problems with adhesion. No repointing needed. When processing you should work with an internal vibrator, since using a vibrating table can slip the bricks from the formliner.

DIMENSIONS

Series	Uses	Dimensions (mm)	Order Number
C	100	▲ 1500/1000 ^{flex} × ► 1000/1500 ^{flex}	C 2080

flex


Formliners labeled as Flex specify the maximal dimensions that they are available in. Any dimension below this value can be chosen freely.

fix

The formliners labeled as Fix can only be delivered in the specified dimension.

uses

We guarantee 100 uses for molds of series C, 50 uses of series A, 10 uses of series E.

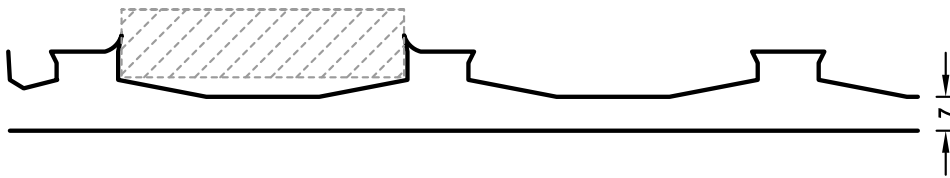

RECKLI HEADQUARTERS

Do you have a question about our products
and would like to get in touch? You can call us
on the following number:

+49 2323 1706-0

RECKLI GmbH
Gewerkenstr. 9a
44628 Herne
Germany
Fax: +49 2323 1706-50
Mail: info@reckli.com
www.reckli.com